


Product Bulletin

Integrating CANbus with TFT RC Monitors

The TFT CANbus adapter (YE-CAN2) enables TFT products to be used on a vehicle's CANbus network. The YE-CAN2 module is installed inline with the monitor power and communication cable.


Does not require interface box	✓
Does not require opening monitor control box	✓
Can be used along with TFT wireless operator station	✓
Compact, easy to install	✓

CANbus Adapter

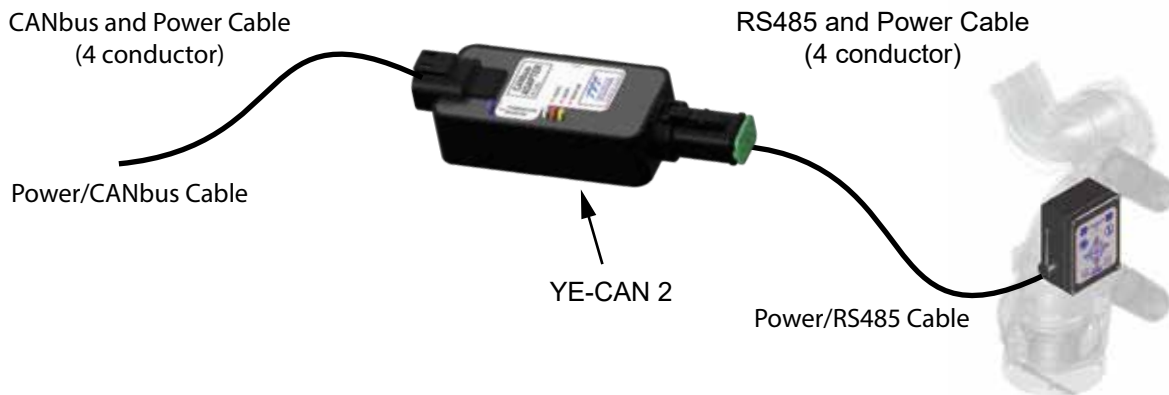

1-4; CONFIGURATION JUMPERS; determine desired address and jumper configuration for your vehicle. Verify your selection to avoid cutting the wrong jumpers. Cutting errors are not covered under warranty.

- 1.** 120Ω Terminating Resistor Jumper
 - Cut blue wire to remove resistor
- 2 and 3.** Address Selection
 - No Wire Cut address 47 (x2F)
 - Cut red wire address 48 (x30)
 - Cut white wire address 49 (x31)
 - Cut red and white wires address 50 (x32)
- 4.** Monitor Application Jumper
 - Cut Yellow wire to operate with TFT Valve Under Monitor (VUM)

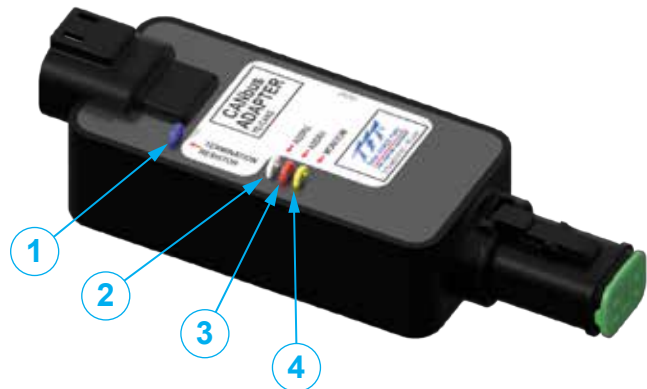

Note: After cutting wires, seal ends with RTV silicone or similar material.