


Portable/Deck Gun Monitor

The CROSSFIRE monitor is the most versatile master stream appliance ever offered to the fire service. Its lightweight, compact design and unique quick-release swivel joint allow for a faster and safer stream deployment in the portable attack mode. The Safe-Tak 1250 utilizes the revolutionary, patented Safe-Tak "flow safety valve." Should the monitor lose contact with the ground surface, the Safe-Tak will automatically reduce flow to the monitor. This safety feature reduces the risk of injury from an out-of-control appliance. Monitor top and base are hardcoat anodized aluminum with a powder coat finish inside and out.

XFT-NJ
17.0 lb (7.5kg)
22" L x 14" W x 14" H
(56 x 36 x 36)cm

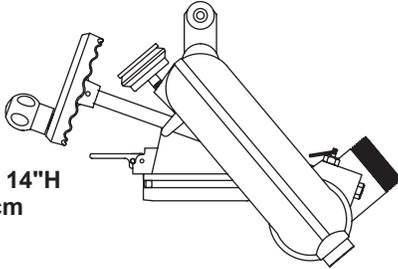


XFT-NJ CROSSFIRE MONITOR TOP 2.5" NH (65mm) OUTLET can be connected to either a portable base or a truck with the adapters on page 64 or a TFT Extend-A-Gun with XL outlet on page 65. The connection is easy, positive, and visually verified. When in use, the release is "locked out" by water pressure. The waterway is a large 3.25" (83mm) which lets the CROSSFIRE deliver up to 1250 gpm (4500 l/min) with low friction loss. Horizontal rotation is securely locked with a simple lever, and position can be visually confirmed. Only seven (7) turns of the handwheel change the discharge elbow from vertical to the stop elevation. Includes highly visible pressure gauge and built-in automatic drain valve. Standard outlet thread is male 2.5" NH (65mm).


SAFE-TAK 1250™

Portable Base With Safety Valve

SAFE-TAK 1250
XFH (see chart)**

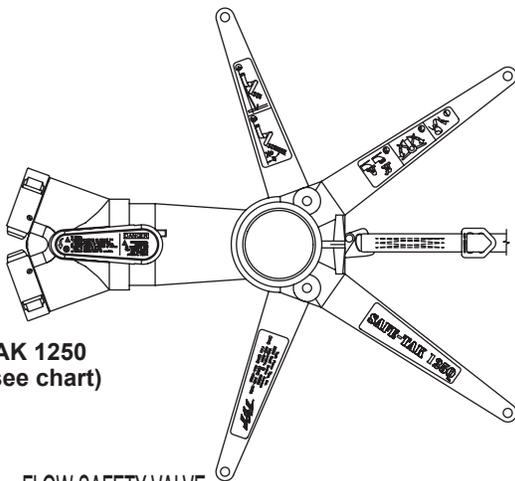


SAFE-TAK 1250 PORTABLE BASE WITH SAFE-TAK VALVE is supplied with either two clappered swivel inlets or with a single full-time swivel inlet. The stainless steel, carbide-tipped base support legs can be folded to easily fit inside a small apparatus compartment, or for carrying pre connected to a hose line. Includes a safety tie-down strap with attached storage cap.

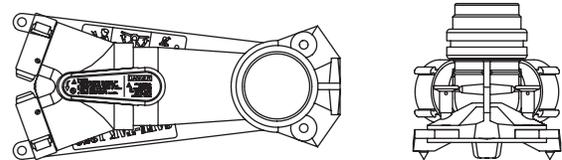


Legs Fold Completely for Easy Storage.

STOW-A-WAY 800
XFL (see chart)**

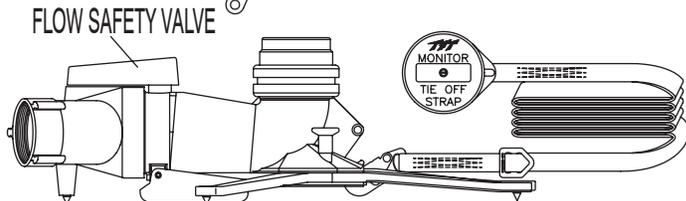

The **STOW-A-WAY 800 PORTABLE BASE WITHOUT SAFE-TAK VALVE** is supplied with either two clappered swivel inlets or with a single full-time swivel inlet. Includes a safety tie-down strap with attached storage cap. STOW-A-WAY 800 portable base is not equipped with SAFE-TAK™ "Flow Safety Valve." Maximum recommended flow with Stow-A-Way Base in portable mode is 800 gpm (3500 l/min). Order XF500-KIT Option \$500.00 to add a flow safety valve. Weight of safety valve is 3.1 lb (1.4kg).

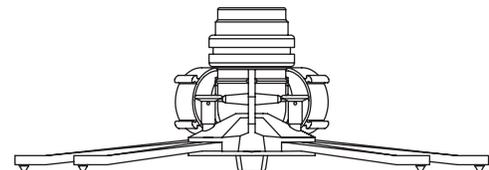



PORTABLE BASE INLET CHART - Please specify inlet thread.

Safe-Tak 1250 Model #	Stow-A-Way 800 Model #	# Inlets	Inlet Siize	Length		Width		Height		Safe-Tak 1250		Stow-A-Way 800	
				in	cm	in	cm	in	cm	lbs	kg	lbs	kg
XFH-1NL	XFL-1NL	1	3.0" NH (75mm)	20.6	52.3	8.1	20.1	8.9	22.6	25.4	11.5	22.3	10.1
XFH-1NN	XFL-1NN	1	3.5" NH (90mm)	20.6	52.3	8.1	20.1	8.9	22.6	25.6	11.6	22.5	10.2
XFH-1NP	XFL-1NP	1	4.0" NH (100mm)	20.8	52.3	8.1	20.1	8.9	22.6	26.2	11.9	23.1	10.4
XFH-1NR	XFL-1NR	1	4.5" NH (115mm)	20.8	52.3	8.1	20.1	8.9	22.6	26.3	12.0	23.2	10.5
XFH-1SP	XFL-1SP	1	4" Storz (100mm)	21.3	54.1	8.1	20.1	8.9	22.6	27.0	12.2	23.0	10.4
XFH-1ST	XFL-1ST	1	5" Storz (125mm)	21.6	54.9	8.1	20.1	8.9	22.6	28.7	13.0	25.6	11.6
XFH-1SX	XFL-1SX	1	6" Storz (150mm)	21.9	55.6	8.1	20.1	8.9	22.6	30.4	13.7	28.2	12.7
XFH-2NJ	XFL-2NJ	2	2.5" NH (65mm)	19.7	50.0	9.3	23.5	8.9	22.6	23.8	10.8	20.7	9.4

Dimensions are with legs folded. With legs unfolded, add 8.5" (215.9CM) to length. Width is 25.8" (655.3cm) in all cases.

Combination Packages with Safe-Tak 1250



XFC-12

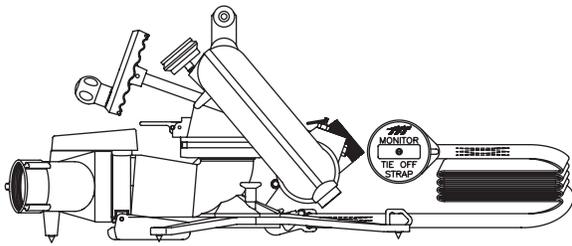

XFC-12 PACKAGE CONTAINS:
SAFE-TAK Base (Specify Inlet)
CROSSFIRE Storage Bracket
CROSSFIRE Monitor Top (Specify Outlet)

SAVE Up to \$530 in package over separate purchase



XFC-42

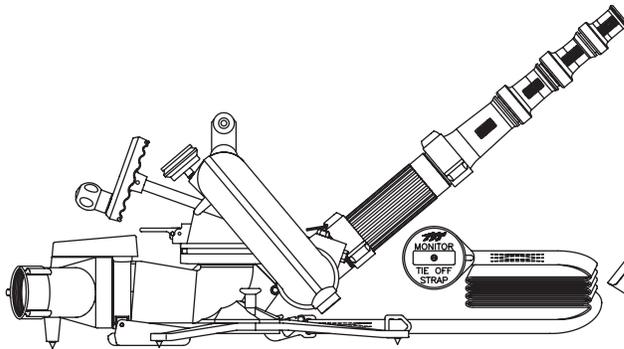

XFC-42 PACKAGE CONTAINS:
SAFE-TAK Base (Specify Inlet)
CROSSFIRE Storage Bracket
CROSSFIRE Monitor Top (Specify Outlet)
Quad Stack Tips (Specify Inlet)
5" or 10" (127 or 254mm) Stream Straightener (Specify Inlet & Outlet)

SAVE Up to \$561 in package over separate purchase



XFC-32

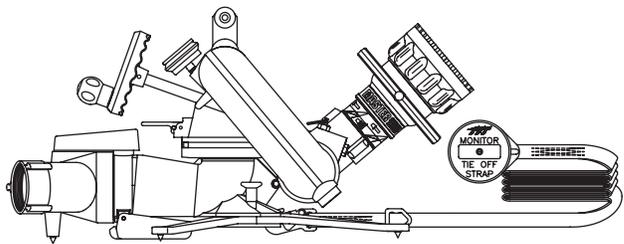

XFC-32 PACKAGE CONTAINS:
SAFE-TAK Base (Specify Inlet)
CROSSFIRE Storage Bracket
CROSSFIRE Monitor Top (Specify Outlet)
Any Master Stream 1000 Nozzle (Specify Inlet)

SAVE Up to \$1095 in package over separate purchase

XFC-52

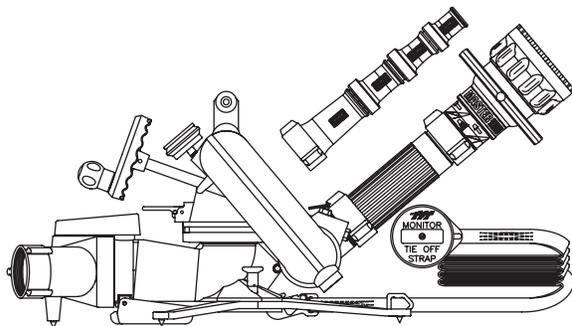


XFC-52 PACKAGE CONTAINS:
SAFE-TAK Base (Specify Inlet)
CROSSFIRE Storage Bracket
CROSSFIRE Monitor Top (Specify Outlet)
Any Master Stream 1000 Nozzle (Specify Inlet)
Quad Stack Tips (Specify Inlet)
5" or 10" (127 or 254mm) Stream Straightener (Specify Inlet & Outlet)

SAVE Up to \$970 in package over separate purchase

Accessories

XFF-MPL
XFF-MPP




XFF-MPL - FLANGE MOUNT 3" ANSI 150 INLET (75mm)

XFF-MPP - FLANGE MOUNT 4" ANSI 150 & 4" NPTF INLET (102mm) For use on riser with companion flange. Compact, hardcoat anodized aluminum adapter allows the CROSSFIRE monitor to be easily utilized as a truck mounted deluge appliance. Hardware and gasket included.

MODEL	FLANGE	BOLTS	INT.THDS	HGT	DIA	WT
XFF-MPL	3" ANSI 150#	4) 5/8-11X3	NONE	5" (12.7cm)	7.5" (19.1cm)	6.9 lb (2.4kg)
XFF-MPP	4" ANSI 150#	8) 5/8-11X3	4 NPT F	8" (20.3cm)	9" (22.9cm)	11 lb (3.1kg)

XFF-CPL
XFF-CPP



XFF-CPL - COMPANION FLANGE KIT 3" ANSI 150

XFF-CPP - COMPANION FLANGE KIT 4" ANSI 150 - 3" or 4" NPT, 150 lb. ANSI cast aluminum, gasket included. Uses 5/8" (15.8mm) bolts (not included)


MODEL	THREADS	FLANGE	BOLTS REQ.	DIA.	WT
XFF-CPL	3 NPT F	3" ANSI 150#	4	7.5" (19.1cm)	3.0 lb (1.4kg)
XFF-CPP	4 NPT F	4" ANSI 150#	8	9" (22.9cm)	4.4 lb (2.0kg)

XFF-APL
3.1 lb (1.4kg)




XFF-APL - TRUCK ADAPTER, 3.0" NPT FEMALE Can be screwed directly on a 3.0" NPT (75mm) male thread. This compact, hardcoat anodized adapter allows the Crossfire monitor to be easily utilized as a truck mounted deluge appliance. 4.5" dia. (110mm) Height: 5.0". (125mm)

XFF-RLF
4.2 lb (1.9kg)



XFF-RLF - EXTEND-A-GUN RC3/CROSSFIRE ADAPTER - This compact, hardcoat anodized adapter attaches to the electronically raised Extend-A-Gun RC3, allowing the Crossfire monitor to be easily utilized as a truck mounted deluge appliance. 6.7" dia. (170mm) Height: 7.0" (178mm)

MST-4NJ
3.1 lb (1.4kg)




MST-4NJ - 4 STACKED TIPS, 2.5" NH (65mm) Designed for monitor use, these lightweight tips are hardcoat anodized, allow four orifice options in one, and have pressure/flow charts laser engraved on each tip. 2.5" NH (65mm) swivel coupling is standard. Orifice openings are 2", 1.75", 1.5", and 1.375". (50mm, 45mm, 38mm and 35mm) Length 16.9". (42.9cm)

MST-4NN


MST-4NN - 4 STACKED TIPS, 3.5" NH (89mm) Same as above (MST-4NJ) but with 3.5" NH (89mm) swivel coupling is standard.

XF-B
3.1 lb (1.4kg)



XF-B - CROSSFIRE STORAGE BRACKET A 13 ga., 304 stainless steel bracket with strap holds the Stow-A-Way 800 or the Safe-Tak 1250 portable base securely while being transported. This 14.75" x 7.75" x 2" (37.5 x 19.7 x 5.1cm) bracket can be mounted vertically or horizontally in any position, including the top or underside of a shelf, on a side wall, or on a compartment door. Includes quick release storage strap.

XF-SS5
1.8 lb (0.8kg)




XF-SS5 - STREAM STRAIGHTENER 5" L. 2.5" NH (65mm) THREADS

XF-SS5-NN

XF-SS10 - STREAM STRAIGHTENER 10" L. 2.5" NH (65mm) THREADS -Extruded aluminum vanes straighten smooth bore streams to provide greater reach with less turbulence. 2.5" NH (65mm) RIGID inlet and outlet threads are standard. XF-SS5 = 5" (125mm) vane length and XF-SS10 = 10" (250mm) vane length.

XF-SS10
3.5 lb (1.9kg)



XF-SS5-NN - STREAM STRAIGHTENER 5" L. 3.5" NH (89mm) THREADS - Same as XF-SS5 above but with 3.5" inlet x 2.5" outlet. 4.6lb (1.6kg)


XF-SS10-NN

XF-SS10-NN - STREAM STRAIGHTENER 10" L. 3.5" NH (89mm) THREADS- Same as XF-SS10 above but with 3.5" inlet x 2.5" outlet. 6.25 lb (2.8kg)

XF400-KIT
7.8 lb (3.5kg)

XF400-KIT - TRUCK MOUNTING BLOCK KIT for direct mounting of the portable base on a truck deck. Allows for use as a deck gun and can be easily removed for portable use when needed. Includes truck mount block with anchor pins and bottom plate for Stow-A-Way 800 or Safe-Tak 1250 portable base.

A18*
3.0 lb (1.4kg)
4.5" (11.4cm) Height
4.5" (11.4cm) Width
6.5" (16.5cm) Depth



A18 Series - PRESSURE RELIEF VALVE - is adjustable from 50 to 200 psi (3 to 14 bar) with easy to see 25 psi increments. See page 135 for model numbers.

